



RNX119

Features & Benefits

- ▶ 1U short depth design console, server rack or relay rack mounted
- ▶ 19" LED LCD
- ▶ Combo interface w/ PS/2 or USB input (active with a USB Hub KVM only)
- ▶ Modular scalability: KVM Switch, Peripherals & More
- ▶ New easy maneuver front handle with two point lock system
- ▶ 6 foot Combo KVM cable included

Modular Scalability

- Multi-platform KVM switch capability: PS/2, USB or Sun
- Mouse: Touchpad(e) or Trackball(b)
- Keyboard available in 13 languages
- DC power options: 48V, 24V or 12V
- VGA Broadcast-grade input
 - or + S-Video + Composite (BNC)
 - or + Audio
 - or + DVI-D
 - or + HDMI with speaker



Port Options



VGA

S-Video + BNC

Audio

HDMI

DVI

DC Power

Specifications

• Weight (Single console)

Net:	27.5 lbs (12.5 kgs)
Gross:	37.4 lbs (17 kgs)

• Weight (with KVM)

Net:	29.7 lbs (13.5 kgs)
Gross:	40.5 lbs (18.4 kgs)

• LCD Panel

Size (diagonal):	19" TFT
Max resolution:	1280 x 1024
Brightness (cd/m2):	250
Backlight:	LED
Colors:	16.7M
Contrast ratio (typ):	1000 : 1
Viewing angle (H/V):	170° x 160°
Active area (mm):	376 x 301
MTBF (hrs):	30,000
Signal input:	VGA

• Casing Color:

Black (RAL 9005)

• Dimensions (Single console)

Product:	17.4W x 19.7D x 1.73H in. (442 x 500 x 44 mm.)
Packing:	23.2 x 30.2 x 5.5 in. (590 x 768 x 140 mm.)
Mounting Depth:	19.7in. (min) to 30.5 in. (max) (500.4 to 774.7 mm.)

• Dimensions (with KVM)

Product:	17.4W x 24.4D x 1.73H in. (442 x 620 x 44 mm.)
Packing:	23.4 x 30.2 x 5.5 in. (595 x 768 x 140 mm.)
Mounting Depth:	25 in. (min) to 36.5 in. (max) (635 to 927.1 mm.)

• Environmental

Operating:	32 to 122°F (0 to 50°C) Degree
Storage:	23 to 140°F (-5 to 60°C) Degree
Relative humidity:	5~90%, non-condensing
Shock:	10G acceleration (11 ms duration)
Vibration:	5~500Hz 1G RMS random vibration

• Regulatory

Safety:	cUL, FCC & CE certified
Environmental	RoHS2 & REACH compliant

• Power

Input:	Auto-sensing 100 to 240VAC, 50 / 60Hz
Consumption:	Max. 48 Watt, Standby 5 Watt



• Combo KVM Cable:

VGA + USB or PS/2, server end
DB15 (VGA, USB KB & MS), console port





REACH

Single Console Diagram

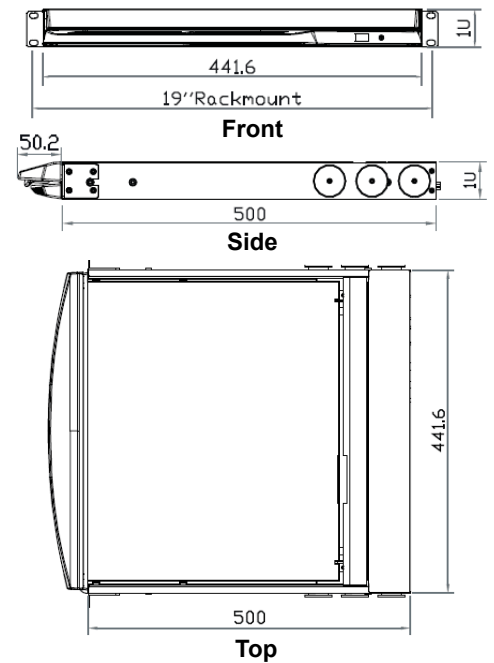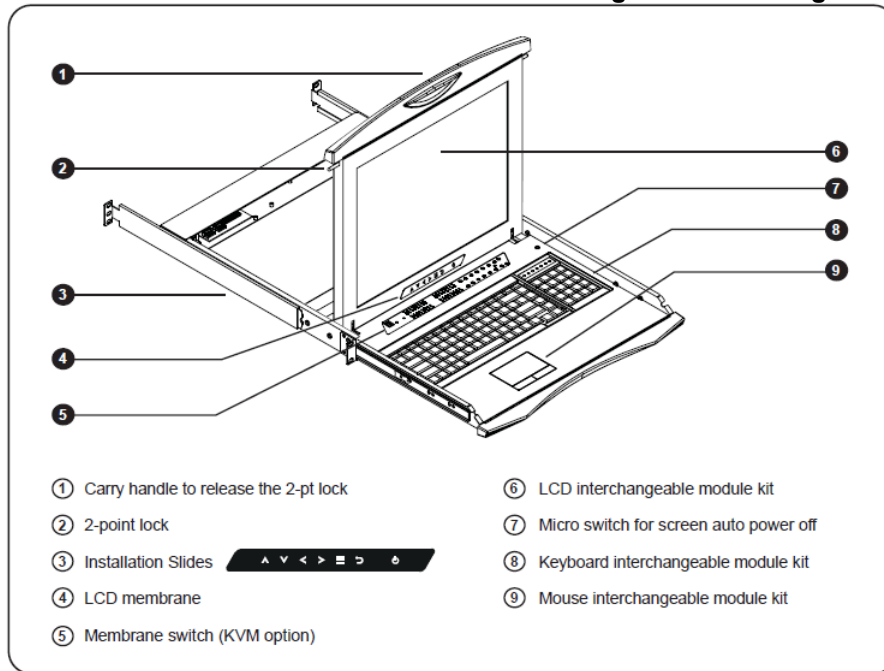

Keyboard Options

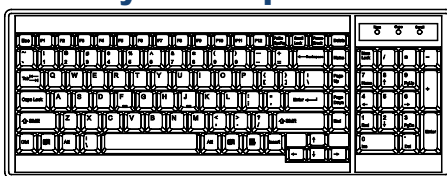

E Keyboard with touchpad



B Keyboard with trackball



Rails & Components

KVM Options

Matrix Cat6 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	1	1	-	RNX119 - CATx31116	RNX119 - CATx31132
	1	1	2	-	RNX119 - CATx41216	RNX119 - CATx41232
	1	1	0	-	RNX119 - CATx21016	RNX119 - CATx21032
	1	2	0	-	RNX119 - CATx32016	RNX119 - CATx32032
	1	3	0	-	RNX119 - CATx43016	RNX119 - CATx43032

Combo Cat6 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	RNX119 - CATx10108	RNX119 - CATx10116	RNX119 - CATx10132
	1	1	0	RNX119 - CATx11008	RNX119 - CATx11016	RNX119 - CATx11032
	1	0	0	RNX119 - CATx10008	RNX119 - CATx10016	RNX119 - CATx10032

Cat6 KVM Dongle : RDG-100S (VGA-USB)/ RDG-100 (VGA-PS/2)/ RDG-100SD (DVI-USB)

Matrix DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	1	1	RNX119 - KVM31108	RNX119 - KVM31116	-
	1	1	2	RNX119 - KVM41208	RNX119 - KVM41216	-
	1	1	0	RNX119 - KVM21008	RNX119 - KVM21016	-
	1	2	0	RNX119 - KVM32008	RNX119 - KVM32016	-
	1	3	0	RNX119 - KVM43008	RNX119 - KVM43016	-

Combo DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	RNX119 - KVM10108	RNX119 - KVM10116	-
	1	1	0	RNX119 - KVM11008	RNX119 - KVM11016	-
	1	0	0	RNX119 - KVM10008	RNX119 - KVM10016	-

Combo DB-15 KVM Cable : RCE-6/10/15 (6, 10 or 15 ft.)

DVI-D KVM	Local	Remote	IP	12-port	-	-
	1	0	0	RNX119 - DVIKVM112	-	-

DVI-D KVM Cable : RCI-6/15 (6 or 15 ft.)