

RNX119 - 19" Standard Console Drawer



Features & Benefits

- 1U 19in. LCD - 1280 x 1024 Max. Resolution
- Enhanced aesthetics with molded front handle and 2-Point lock
- Simple to install, configure, and operate for easy, at-the-rack access of all your rack-based servers.
- Supports Windows, Linux, Mac, and other operating Systems
- USB and PS2 interface with included 6 foot console cable (PS/2 support by request).
- UL, cUL, CE, FCC, & CCC Certified
- PC, SUN or MAC keyboard layout, and audio support.
- Industry-leading 2 year warranty, extendable up to 5 years.

Modular Options


- Integrated KVM switch capability - 8 to 32 Port; 1 to 4 Users (local / extender / over-IP)
- Mouse: Touchpad or Trackball
- Keyboard available in 13 languages
- DC power options: 12V / 24V / 48V / 110V / 125V
- Audio Options: 2.5mm / Speaker / Composite (BNC)
- Video Options: VGA / DVI / HDMI (HDCP) / S-Video

19" Modular Monitor Keyboard Drawer



The Raloy RNX119 rack console features a 19" 1280 x 1024 LCD, full 104 key keyboard and touchpad or trackball mouse, and a **2-point locking assembly** that fastens the RNX119 for dynamic environments. The RNX119 offers a space saving, streamlined approach to your rack environment by integrating your monitor, keyboard, mouse and optional KVM in a single unit.

Access your servers with a streamlined, highly customizable Raloy rack console drawer. Integrate a modular KVM switch to control multiple servers from a single unit. Consolidate server access for virtually any environment, in 1U.



Integrated KVM Switch Options

Cat6 KVM	Local	Extended	IP	8-Port	16-Port	32-Port
	1	0	0	RWX119 - CATx10008	RWX119 - CATx10016	RWX119 - CATx10032
	1	0	0	RWX119 - CATx11008	RWX119 - CATx11016	RWX119 - CATx11032
	1	0	1	RWX119 - CATx10108	RWX119 - CATx10116	RWX119 - CATx10132
	1	1	1	-	RWX119 - CATx31116	RWX119 - CATx31132
	1	1	2	-	RWX119 - CATx41216	RWX119 - CATx41232
	1	1	0	-	RWX119 - CATx21016	RWX119 - CATx21032
	1	2	0	-	RWX119 - CATx32016	RWX119 - CATx32032
	1	3	0	-	RWX119 - CATx43016	RWX119 - CATx43032

Cat6 KVM Dongles: RDG-100SD (DVI-USB) / RDG-100H (HDMI-USB) / RDG-100P (DP-USB) / RDG-100S (VGA-USB) / RDG-100 (VGA-PS2)


VGA KVM	Local	Extended	IP	8-Port	16-Port	32-Port
	1	0	0	RWX119 - KVM10008	RWX119 - KVM10016	-
	1	1	0	RWX119 - KVM11008	RWX119 - KVM11016	-
	1	0	1	RWX119 - KVM10108	RWX119 - KVM10116	-
	1	1	1	RWX119 - KVM31108	RWX119 - KVM31116	-
	1	1	2	RWX119 - KVM41208	RWX119 - KVM41216	-
	1	1	0	RWX119 - KVM21008	RWX119 - KVM21016	-
	1	2	0	RWX119 - KVM32008	RWX119 - KVM32016	-
	1	3	0	RWX119 - KVM43008	RWX119 - KVM43016	-

VGA Hub KVM	Local	Extended	IP	8-Port	16-Port	32-Port
	1	0	0	RWX119 - HKVM10008	RWX119 - HKVM10016	-
	1	1	0	RWX119 - HKVM11008	RWX119 - HKVM11016	-
	1	0	1	RWX119 - HKVM10108	RWX119 - HKVM10116	-

DB-15 VGA KVM Cables: RCB-6 (6 ft.) / RCB-10 (10 ft.) / RCB-15 (15 ft.)

DVI KVM	Local	Extended	IP	12-Port	-
	1	0	0	RWX119 - DVIKVM112	-

DVI-D KVM Cables: RCI-6 (6ft.) / RCI-15 (15 ft.)

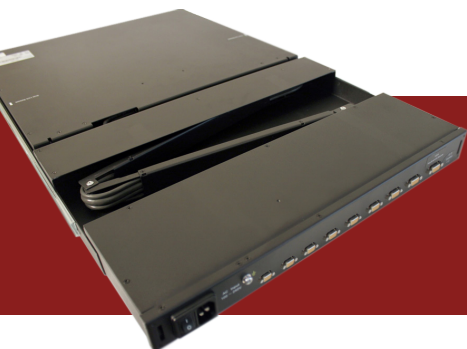

Dependable, integrated KVM switches for quick, efficient at-the-rack access of your critical servers.

Model	RWX119	RWX119 with Integrated KVM
Product Dimensions (HxWxD)	1.73 x 17.4 x 19.7 in (44 x 442 x 500 mm)	1.73 x 17.4 x 24.4 in (44 x 442 x 620 mm)
Package Dimensions (HxWxD)	5.5 x 23.2 x 30.2 in (140 x 595 x 768 mm)	5.5 x 23.4 x 30.2 in (140 x 595 x 768 mm)
Net Weight	27.5 lb (12.5 kg)	29.2 lb (13.3 kg)
Mounting Depth	19.7 in. (min) to 30.5 in. (max) (500.4 to 774.7 mm)	25 in. (min) to 36.5 in. (max) (635 to 927.1 mm)
KVM Cable (included)	1 x 6 ft Combo Cable (VGA, USB)	8-Port: 8 x KVM Cable; 16 & 32-Port: 16x KVM Cable
LCD Panel / Video & Audio		
Display Size	19" TFT	
Max Resolution (dots x lines)	1280 x 1024	
Backlight Type	LED	
Brightness (nits)	250	
Contrast Ratio (typ.)	1000:1	
Color	16.7 M	
Viewing Angle (H/V)	170° x 160°	
Active area (mm)	376 x 301	
Standard Video Input	VGA	
Optional Video Input	HDMI, DVI, Composite (BNC), S-Video	HDMI, DVI, DisplayPort, VGA
Audio	Optional Built-in Dual Stereo Speakers 2W x 2	
Power		
Supply Range	Auto-sensing 100 to 240VAC, 50 / 60Hz	
Keyboard		
Keyboard / Mouse	104-key Notepad Keyboard / Glidepoint Touchpad	
Keyboard Layout	Windows (standard), MAC , SUN	
Keyboard Languages	United States (standard), United Kingdom, Germany, France, Spain, Norway, Italy, Russia, Switzerland, Netherlands, Portugal, China, Japan, Korea, Arabia, Turkey	
Environmental Specifications		
MTBF (hrs)	30,000	
Operation Temperature	32 to 122°F (0 to 50°C)	
Storage Temperature	23 to 140°F (-5 to 60°C)	
Operating Humidity	5-90%, non-condensing	



Access | Integrate | Consolidate